CATALOGUE

POWER TOOLS

Empowering professionals with high-performance power tools that deliver precision, durability, and efficiency, driving productivity and success in every project.

DRILLS

CORDED/CORDLESS

BRUSHLESS CORDLESS DRILL

21V - 1500mAh **RF2009**

Item No.	RF2009
Rated Voltage	21V
No-load Speed	0-1450rpm
Max. Torque	45n.m
Max cutting depth *(concrete/wood/steel)*	10mm

BRUSHED CORDLESS DRILL

21V - 2000mAh **RF2007**

Item No.	RF2007
No-load Speed	0-350rpm/0-1350rpm
Torque	8+3 drilling setting
Max. Torque	28n.m
Charging Time	3-5hrs
Drill Func.	wood /plastic furniture assembly

BRUSHLESS CORDLESS DRILL

16.8V - 1500mAh **RF2008**

Item No.	RF2008
Rated Voltage	16.8V
No-load Speed	0-1450rpm
Max. Torque	32n.m
Max cutting depth *(concrete/wood/steel)*	10mm

BRUSHED CORDLESS DRILL

12V - 1500mAh **RF2006**

Item No.	RF2006
No-load Speed	0-350rpm/0-1350rpm
Torque	18+1 drilling setting
Max. Torque	14n.m
Charging Time	3-5hrs
Drill Func.	metal/steel/porcelainiron

CORDED IMPACT DRILL

POWER 850W **RF1005**

Item No.	RF1005
Dimensions	850W
Max.Drilling Diameter	13mm
Impact capacity	0-44800 b.p.m
Retaining Collar	43mm
Spindle Thread	1/2"*20UNF

CORDED DRILL

POWER 380W **RF1018**

Item No.	RF1018
Max. Drilling Diameter	13mm
Rated input Power	700W
Drill capacity	220V150HZ
Retaining Collar	1/2"* 20UNF
Frequency	50-60Hz

ANGLE GRINDER

CORDED/CORDLESS/BRUSHLESS

CORDED ANGLE GRINDER

POWER 700W **RF1017**

Item No.	RF1017	Input power	700W
Disc diameter	115mm	Machine weight	1.73kg
No-load Speed	500-11000rpm	Packing type	color box

CORDED ANGLE GRINDER

POWER 800W **RF1009**

Item No.	RF1009	Input power	800W
Disc diameter	115mm	Machine weight	1.76kg
No-load Speed	500-11000rpm	Packing type	color box

CORDED ANGLE GRINDER

POWER 720W **RF1021**

Item No.	RF1021	Input Power	720W
Rated Voltage	110/240V	Frequency	50/60Hz
No-load Speed	13000rpm	Disc Diameter	115mm

BRUSHLESS CORDLESS ANGLE GRINDER

21V - 3000mAh **RF2010**

Item No.	RF2010	Input Power	1050W
Rated Voltage	21V	Battery Capacity	3000mAh*2pcs
No-load Speed	7500rpm	Output shaft size	M14

CUTTING DISC

Professional Cutting Disc

Made with industrial abrasives for metal/stone/ceramic. Fast, precise cuts with smooth finishes. Explosion-proof & safe at high RPM. 2X longer lifespan – the pro's choice!

ROTARY & DEMOLITION HAMMERS

CORDED ROTARY HAMMER

POWER 1200W **RF1019**

Item No.	RF1019	Max Power	1200W
Impact Power	3.0 J	Max. Drilling Diameter	26mm
Rated Torque	55N.m	Drill capacity	220V/50HZ

CORDED DEMOLITION HAMMERS

POWER 1400W **RF1020**

Item No.	RF1020	Max Power	1400W
Impact Power	4.0 J	Drilling dia.	Concrete:38mm
No Load Speed	2900rpm	Drill capacity	220V/50HZ

CHAINSAW SERIES

EQUIPPED WITH A HIGH-EFFICIENCY
BRUSHLESS MOTOR

BRUSHLESS RECIPROCATING SAW

21V - 1500mAh **RF2014**

Item No.	RF2014
Rated Voltage	21V
No-load Speed	0-3500trpm
Battery capacity	1500mAh*2pcs
Max. cutting capacity	100mm
Motor	4815 brushless motor

BRUSHLESS CHAINSAW

21V - 1500mAh **RF2013**

Item No.	RF2013
Rated Voltage	21V
No-load Speed	3500rpm
Battery capacity	1500mAh*2pcs
Bar size	8”
Motor	4815 brushless motor

BRUSHLESS MOTOR

JIG SAW
SERIES

BRUSHLESS CORDLESS JIG SAW

21V - 3000mAh **RF2011**

Item No.	RF2011
Rated Voltage	21V
No-load Speed	0-8000rpm
Battery capacity	3000mAh*2pcs
Max cutting depth *(Wood)*	85mm
Max cutting depth *(Steel)*	10mm

CORDED JIG SAW

POWER 850W **RF1022**

Item No.	RF1022
Power	850W
No-load Speed	500-3000rpm
Power supply parameters	220V/50HZ
Max cutting depth *(Wood)*	65mm
Max cutting depth *(Steel)*	10mm

GASOLINE GENERATORS

&

INVERTER GENERATORS

FEATURES

1- Copper Wire Motor
2- Electric Starter
3- Remote Control Starter
4- Multi Fuel Function
5- High Temperture Resistant Motor, Suitable for Toughest Environments
6- OHV Engine More Powerful, 5%-8% Power Increasing

Rated Speed **3000** RPM

Max power **3000W**

Displacement **210CC**

CONTROL PANEL

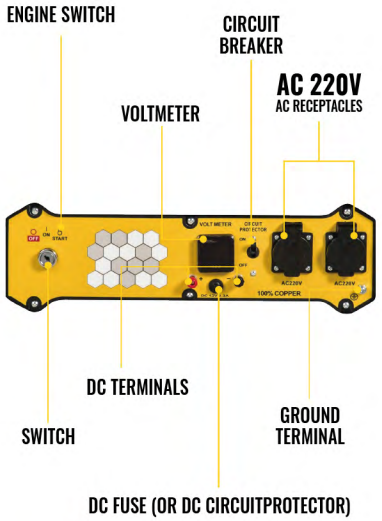

GASOLINE GENERATOR RF7006

Rated power	2.8KW
Max power	3.0KW
Alternator Material	100% COPPER
Alternator size	160*120MM
Rated voltage	220V
Voltage regulation	AVR
D.C Output	12V/8.3A
Rated frequency	50HZ
Phase	Single Phase
Power factor COS φ	1
Insulation level grade	F
Fuel	Gasoline/LPG
Fuel tank capacity	15 L
Engine model	BS170F
Engine type	Single Cylinder, Air-Cooled, 4-stroke,OHV
Displacement	210CC
Bore*Stroke	70*55
Rated Speed (rpm)	3000
Starting system	Hand Start/ElectricStart/ Remotestart
Wheels and handrail	NO
Oil capacity	0.6L
Dimension L×W×H (cm)	60.5*44*44CM
Weight N.W (kg)	44.24KG
Weight GW (kg)	46KG
40'HQ Quantity Set/40HQ	580
Noise (7m)	/
Unit Size L*W*H	/

PACKAGE INCLUDED

Split-type gas pressure regulator
Sleeve and rod assembly
European plug
Key
Bolt and nut set
Support foot
Instruction manual

FEATURES

1- Copper Wire Motor
2- Electric Starter
3- Remote Control Starter
4- Multi Fuel Function
5- High Temperture Resistant Motor, Suitable for Toughest Environments
6- OHV Engine More Powerful, 5%-8% Power Increasing
7- Strong Metal Wheels And Handles

Rated Speed **3000** RPM

Max power **5500W**

Displacement **420CC**

CONTROL PANEL

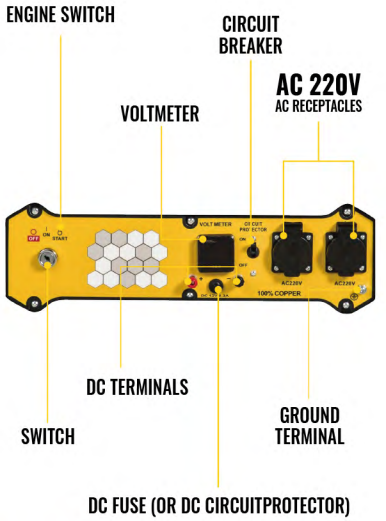

GASOLINE GENERATOR RF7007

Rated power	5.0KW
Max power	5.5KW
Alternator Material	100% COPPER
Alternator size	190*140mm
Rated voltage	220V
Voltage regulation	AVR
D.C Output	12V/8.3A
Rated frequency	50HZ
Phase	Single Phase
Power factor COS φ	1
Insulation level grade	F
Fuel	Gasoline/LPG
Fuel tank capacity	25 L
Engine model	BS190F
Engine type	Single Cylinder, Air-Cooled, 4-stroke,OHV
Displacement	420CC
Bore*Stroke	90*66
Rated Speed (rpm)	3000
Starting system	Hand Start/ElectricStart/ Remotestart
Wheels and handrail	YES
Oil capacity	1.1L
Dimension L×W×H (cm)	69×53×55.5CM
Weight N.W (kg)	81.3KG
Weight GW (kg)	83.86KG
40'HQ Quantity Set/40HQ	280
Noise (7m)	/
Unit Size L*W*H	/

PACKAGE INCLUDED

Split-type gas pressure regulator
Sleeve and rod assembly
European plug
Key
Short bolt and nut set
Medium-length bolt and nut set
Long bolt and nut set
Support foot with bracket
Instruction manual
Wheel handle
Wheel bracket

FEATURES

1- Copper Wire Motor
2- Electric Starter
3- Remote Control Starter
4- Multi Fuel Function
5- High Temperture Resistant Motor, Suitable for Toughest Environments
6- OHV Engine More Powerful, 5%-8% Power Increasing
7- Strong Metal Wheels And Handles

Rated Speed **3000** RPM

Max power **7500W**

Displacement **458CC**

CONTROL PANEL

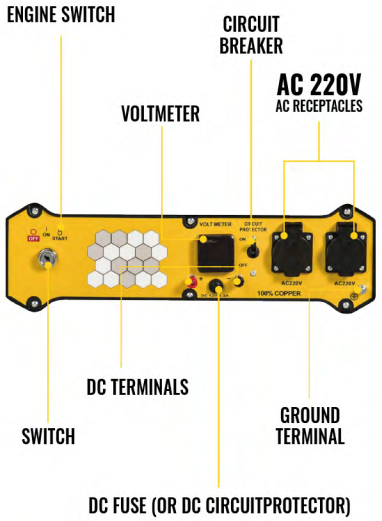

GASOLINE GENERATOR RF7014

Rated power	7.0KW
Max power	7.5KW
Alternator Material	100% COPPER
Alternator size	190*160MM
Rated voltage	220V
Voltage regulation	AVR
D.C Output	12V/8.3A
Rated frequency	50HZ
Phase	Single Phase
Power factor COS φ	1
Insulation level grade	F
Fuel	Gasoline/LPG
Fuel tank capacity	25 L
Engine model	BS192F
Engine type	Single Cylinder, Air-Cooled, 4-stroke,OHV
Displacement	458CC
Bore*Stroke	92*69
Rated Speed (rpm)	3000
Starting system	Hand Start/ElectricStart/ Remotestart
Wheels and handrail	YES
Oil capacity	1.1L
Dimension L×W×H (cm)	69×53×55.5CM
Weight N.W (kg)	86.94KG
Weight GW (kg)	89.54KG
40'HQ Quantity Set/40HQ	280
Noise (7m)	/
Unit Size L*W*H	/

PACKAGE INCLUDED

Split-type gas pressure regulator
Sleeve and rod assembly
European plug
Key
Short bolt and nut set
Medium-length bolt and nut set
Long bolt and nut set
Support foot with bracket
Instruction manual
Wheel handle
Wheel bracket

FEATURES

1- Copper Wire Motor
2- Electric Starter
3- Remote Control Starter
4- High Temperture Resistant Motor, Suitable for Toughest Environments
5- OHV Engine More Powerful, 5%-8% Power Increasing
6- Strong Metal Wheels And Handles

Rated Speed **3000** RPM

Max power **10000W**

Displacement **500CC**

CONTROL PANEL

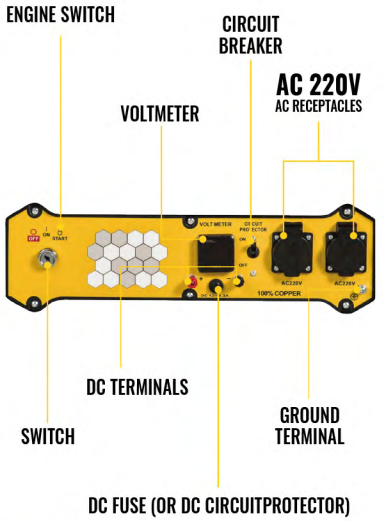

GASOLINE GENERATOR RF7015

Rated power	9.0KW
Max power	10KW
Alternator Material	100% COPPER
Alternator size	190*165MM
Rated voltage	220V
Voltage regulation	AVR
D.C Output	12V/8.3A
Rated frequency	50HZ
Phase	Single Phase
Power factor COS φ	1
Insulation level grade	F
Fuel	Gasoline
Fuel tank capacity	25 L
Engine model	BS194F
Engine type	Single Cylinder, Air-Cooled, 4-stroke,OHV
Displacement	500CC
Bore*Stroke	94*72
Rated Speed (rpm)	3000
Starting system	Hand Start/ElectricStart/ Remotestart
Wheels and handrail	YES
Oil capacity	1.1L
Dimension L×W×H (cm)	73*56*61CM
Weight N.W (kg)	95.46KG
Weight GW (kg)	98.12KG
40'HQ Quantity Set/40HQ	250
Noise (7m)	/
Unit Size L*W*H	/

PACKAGE INCLUDED

Sleeve and rod assembly
European plug
Single-phase industrial plug
Key
Short bolt and nut set
Medium-length bolt and nut set
Long bolt and nut set
Support foot with bracket
Instruction manual
Wheel handle
Wheel bracket

FEATURES

1- Copper Wire Motor
2- Electric Starter
3- Remote Control Starter
4- Multi Fuel Function
5- High Temperture Resistant Motor, Suitable for Toughest Environments
6- OHV Engine More Powerful, 5%-8% Power Increasing

Rated Speed **3000** RPM

Max power **3000W**

Displacement **210CC**

CONTROL PANEL

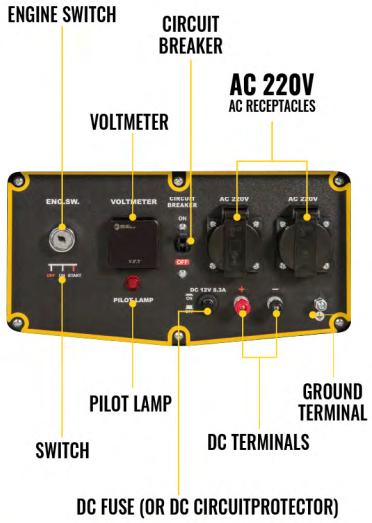

GASOLINE GENERATOR RF7009

Rated power	2.8KW
Max power	3.0KW
Alternator Material	100% COPPER
Alternator size	160*120MM
Rated voltage	220V
Voltage regulation	AVR
D.C Output	12V/8.3A
Rated frequency	50HZ
Phase	Single Phase
Power factor COS φ	1
Insulation level grade	F
Fuel	Gasoline/LPG
Fuel tank capacity	15 L
Engine model	BS170F
Engine type	Single Cylinder, Air-Cooled, 4-stroke,OHV
Displacement	210CC
Bore*Stroke	70*55
Rated Speed (rpm)	3000
Starting system	Hand Start/ElectricStart/ Remotestart
Wheels and handrail	YES
Oil capacity	0.6L
Dimension L×W×H (cm)	60.5*48.5*50CM
Weight N.W (kg)	51.74KG
Weight GW (kg)	53.76KG
40'HQ Quantity Set/40HQ	455
Noise (7m)	/
Unit Size L*W*H	/

PACKAGE INCLUDED

Split-type gas pressure regulator
Sleeve and rod assembly
European plug
Key
Short bolt and nut set
Medium-length bolt and nut set
Long bolt and nut set
Support foot with bracket
Instruction manual
Wheel

FEATURES

1- Copper Wire Motor
2- Electric Starter
3- Remote Control Starter
4- Multi Fuel Function
5- High Temperture Resistant Motor, Suitable for Toughest Environments
6- OHV Engine More Powerful, 5%-8% Power Increasing

Rated Speed **3000** RPM

Max power **5500W**

Displacement **420CC**

CONTROL PANEL

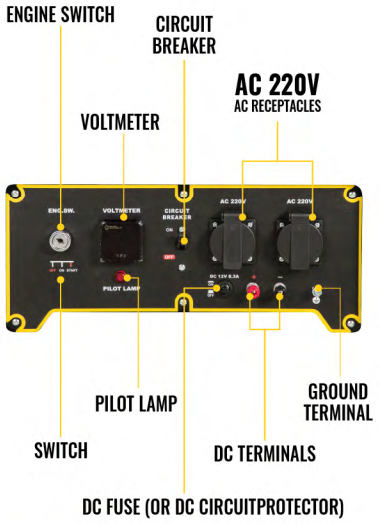

GASOLINE GENERATOR RF7010

Rated power	5.0KW
Max power	5.5KW
Alternator Material	100% COPPER
Alternator size	190*140mm
Rated voltage	220V
Voltage regulation	AVR
D.C Output	12V/8.3A
Rated frequency	50HZ
Phase	Single Phase
Power factor COS φ	1
Insulation level grade	F
Fuel	Gasoline/LPG
Fuel tank capacity	25 L
Engine model	BS190F
Engine type	Single Cylinder, Air-Cooled, 4-stroke,OHV
Displacement	420CC
Bore*Stroke	90*66
Rated Speed (rpm)	3000
Starting system	Hand Start/ElectricStart/ Remotestart
Wheels and handrail	YES
Oil capacity	1.1L
Dimension L×W×H (cm)	69×53×55.5CM
Weight N.W (kg)	82.76KG
Weight GW (kg)	85.26KG
40'HQ Quantity Set/40HQ	280
Noise (7m)	/
Unit Size L*W*H	/

PACKAGE INCLUDED

Split-type gas pressure regulator
Sleeve and rod assembly
European plug
Key
Short bolt and nut set
Medium-length bolt and nut set
Long bolt and nut set
Support foot with bracket
Instruction manual
Wheel

FEATURES

1- Copper Wire Motor
2- Large Fuel Tank For Long-Time Running
3- ATS and Remote Controller Available
4- Multi Fuel Function
5- High Temperture Resistant Motor, Suitable for Toughest Environments
6- OHV Engive More Powerful, 5%-8% Power Increasing

Rated Speed **3000** RPM

Max power **11000W**

Displacement **744CC**

CONTROL PANEL

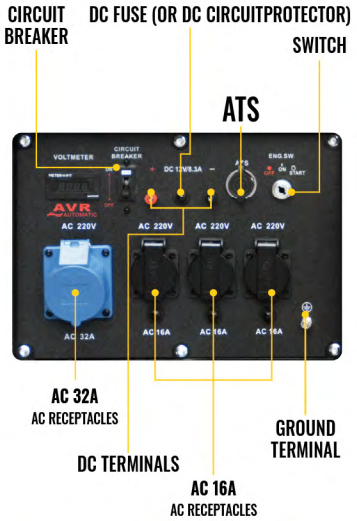

GASOLINE GENERATOR RF7013

Rated power	10KW
Max power	11KW
Alternator Material	100% COPPER
Alternator size	230*160MM
Rated voltage	220V
Voltage regulation	AVR
D.C Output	12V/8.3A
Rated frequency	50HZ
Phase	Single Phase
Power factor COS φ	1
Insulation level grade	F
Fuel	Gasoline/LPG/CNG
Fuel tank capacity	45 L
Engine model	2V80F
Engine type	2- Cylinder, Air-Cooled, 4-stroke,OHV
Displacement	744CC
Bore*Stroke	94*72
Rated Speed (rpm)	3000
Starting system	Hand Start/Electric Start/ Remote start
Wheels and handrail	YES
Oil capacity	1.5L
Dimension L×W×H (cm)	98*65*81.5CM
Weight N.W (kg)	171KG
Weight GW (kg)	181.3KG
40'HQ Quantity Set/40HQ	125
Noise (7m)	/
Unit Size L*W*H	/

PACKAGE INCLUDED

Split-type gas pressure regulator
Sleeve and rod assembly
Wrench / Screwdriver
European plug
Single-phase industrial plug
Key / Bolt and nut set
Instruction manual
Wheel
DC cable / ATS box

FEATURES

1- Copper Wire Motor
2- Electric Starter
3- Remote Control Starter
4- Multi Fuel Function
5- High Temperture Resistant Motor, Suitable for Toughest Environments
6- OHV Engine More Powerful, 5%-8% Power Increasing

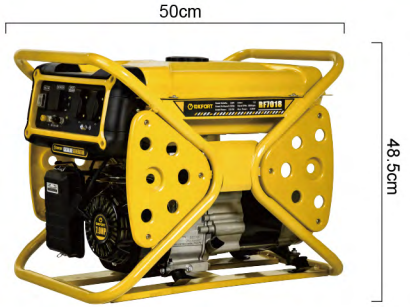

Rated Speed **3000** RPM

Max power **6500W**

Displacement **420CC**

CONTROL PANEL

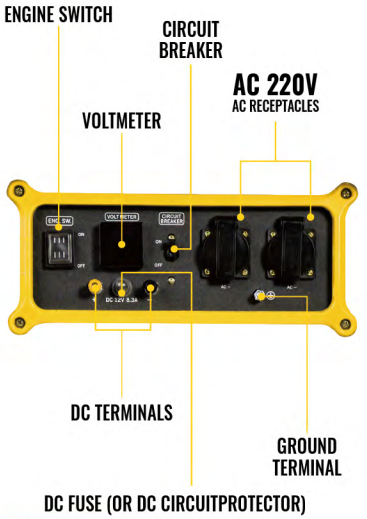

GASOLINE GENERATOR RF7018

Rated power	5.0KW
Max power	6.5KW
Alternator Material	100% COPPER
Alternator size	190*150MM
Rated voltage	220V
Voltage regulation	AVR
D.C Output	12V/8.3A
Rated frequency	50HZ
Phase	Single Phase
Power factor COS φ	1
Insulation level grade	F
Fuel	Gasoline
Fuel tank capacity	25 L
Engine model	BS190F
Engine type	Single Cylinder, Air-Cooled, 4-stroke,OHV
Displacement	420CC
Bore*Stroke	90*66
Rated Speed (rpm)	3000
Starting system	Hand Start/Electric Start
Wheels and handrail	YES
Oil capacity	1.1L
Dimension L×W×H (cm)	71.5*56*59.5CM
Weight N.W (kg)	82KG
Weight GW (kg)	85KG
40'HQ Quantity Set/40HQ	265
Noise (7m)	/
Unit Size L*W*H	/

PACKAGE INCLUDED

Sleeve and rod assembly
European plug
Key
Support foot with bracket
Instruction manual
Wheel
Handrail
Bolt and nut set

FEATURES

1- Inverter Technology For Clean Power, THD<3%
2- Economy System, Electronic Speed Control Function, Low Fuel Consumption
3- Parallel Operation Function
4- Ultra Quiet, Low Noise Level
5- Light And Portable

Rated Speed **4400** RPM

Max power **2500W**

Displacement **122CC**

CONTROL PANEL

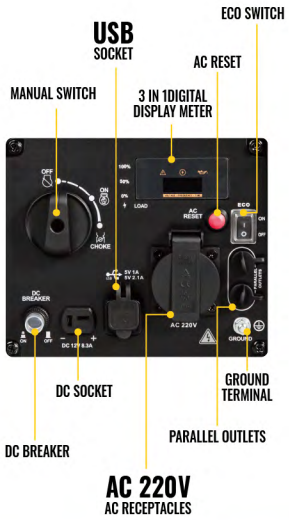

INVERTER GENERATOR RF7011

Rated power	2.3KW
Max power	2.5KW
Alternator Material	100% COPPER
Alternator size	120×31mm
Rated voltage	220V
Voltage regulation	AVR
D.C Output	12V/8.3A
Rated frequency	50HZ
Phase	Single Phase
Power factor COS φ	1
Insulation level grade	F
Fuel	Gasoline
Fuel tank capacity	4.8 L
Engine model	R120-Vi
Engine type	Single Cylinder, Air-Cooled, 4-stroke,OHV
Displacement	122CC
Bore*Stroke	60*43
Rated Speed (rpm)	4400
Starting system	Hand Start
Wheels and handrail	NO
Oil capacity	0.38L
Dimension L×W×H (cm)	59.5*35*51CM
Weight N.W (kg)	25KG
Weight GW (kg)	26.5KG
40'HQ Quantity Set/40HQ	625
Noise (7m)	/
Unit Size L*W*H	/

PACKAGE INCLUDED

Sleeve and rod assembly
Screwdriver
European plug
DC cable
Oil filling funnel
Instruction manual

FEATURES

1- Inverter Technology For Clean Power, THD<3%
2- Economy System, Electronic Speed Control Function, Low Fuel Consumption
3- Parallel Operation Function
4- Ultra Quiet, Low Noise Level
5- Light And Portable

Rated Speed **4800** RPM

Max power **5500W**

Displacement **223CC**

CONTROL PANEL

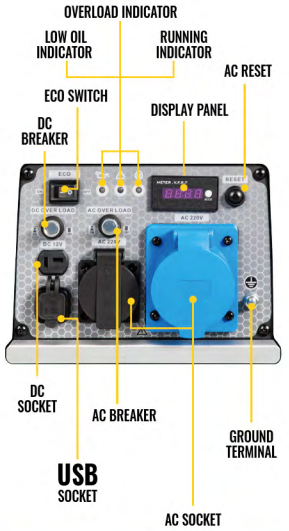

INVERTER GENERATOR RF7012

Rated power	5.0KW
Max power	5.5KW
Alternator Material	100% COPPER
Alternator size	200×75mm
Rated voltage	220V
Voltage regulation	AVR
D.C Output	12V/8.3A
Rated frequency	50HZ
Phase	Single Phase
Power factor COS φ	1
Insulation level grade	F
Fuel	Gasoline/LPG
Fuel tank capacity	11 L
Engine model	225i-3
Engine type	Single Cylinder, Air-Cooled, 4-stroke,OHV
Displacement	223CC
Bore*Stroke	72*58
Rated Speed (rpm)	4800
Starting system	Hand Start/Electric Start
Wheels and handrail	YES
Oil capacity	0.7L
Dimension L×W×H (cm)	75.5*48*64CM
Weight N.W (kg)	42KG
Weight GW (kg)	46.7KG
40'HQ Quantity Set/40HQ	360
Noise (7m)	/
Unit Size L*W*H	/

PACKAGE INCLUDED

Split-type gas pressure regulator
Sleeve and rod assembly
Screwdriver
European plug
Single-phase industrial plug
DC cable
Oil filling funnel
Instruction manual

BRUSHLESS PRUNING SHEARS

1500mAh 21V **RF2012**

Item No.	RF2012
Rated Voltage	21V
Max. cutting capacity	28MM
Sawblade material	SK5
Battery Capacity	1500mAh

Brushless motor with LcD displayscree

BRUSHLESS PRUNING SHEARS

Advanced Brushless Motor: Featuring a high-efficiency brushless motor, this scissor delivers superior cutting power, extended runtime, and minimal maintenance, ensuring consistent performance over time.

MAGNETIC MEASURING TAPE

3/5/10/7.5mm **RF5003**

Length	3M, 5M, 10m, 7.5m	Blade Thickness	0.14mm
Material	ABS & Stainless Steel	Blade Material	Carbon Steel Materiale
Blade Width	25mm	Hook	Steel Hook

LIGHTWEIGHT MEASURING TAPE

3/5/7.5mm **RF5026**

Length	3M, 5M, 7.5m	Blade Thickness	0.14mm
Material	ABS & Stainless Steel	Blade Material	Carbon Steel Materiale
Blade Width	25mm	Hook	Steel Hook

CAR AIR COMPRESSOR

POWER 280W **RF3009**

Item No.	RF3009	Pressure Flow	>75L/min
Power Source	Electric	Max Power	280W
Function	Tire pressure monitor	Item Size	250*95*160mm

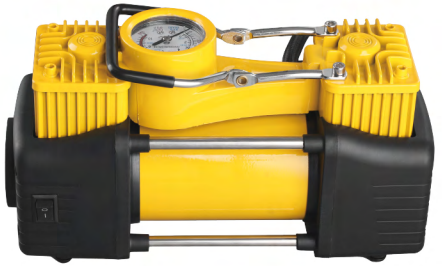

JOBSITE BLOWER

POWER 420W **RF1015**

Item No.	RF1015	Air volume	2.8m3/min
Voltage	220V	Machine weight	1.4kg
No-load Speed	0-16000rpm	Material	ABS

HIGH PRESSURE WATER GUN

Adjustable Flow **RF7005**

Item No.	RF7005	Material	Aliminum Alloy
Size	16.5*2.4	Connector	Quick Connector
Function	Watering Cleaning Washing	Working Pressure	High Pessure

OKFORT

DC BRUSHLESS MOTOR

CORDLESS HANDLE VACUUM CLEANER

POWER 110W **RF3010**

Item No.	RF3010	Input Power	110W
Rated Voltage	5V⎓2A	Dust cup capacity	0.3L
No-load Speed	80000rpm	Motor Type	DC Brushless Motor

CORDLESS HANDLE VACUUM CLEANER

6in1

ROKFORT

ROKFORT TOOLS & HARDWARE CO., LTD

sales@rokfort.com www.rokfort.com